



SmartBright Direct Panel G2

RC048B LED32S/865 PSU W30L120 NOC GM

Power supply unit - Beam angle 120° - Opal - 120°

The new Philips Smartbright Direct panel offers exceptional value. It is Perfect for your everyday ceiling lighting installations. It is available in 2 standard sizes and 2 different CCT options to suit your need.

Product data

General Information		Operating and Electrical	
Beam angle of light source	120°	Constant light output	No
Light source color	865 cool daylight	Number of products on MCB of 16 A type B	35
Light source replaceable	No	EU RoHS compliant	No
Number of gear units	1 unit	Light source engine type	LED
Driver/power unit/transformer	Power supply unit	Operating and Electrical	
Driver included	Yes	Input Voltage	220 to 240 V
Optic type	Beam angle 120°	Input Frequency	50 or 60 Hz
Optical cover/lens type	Opal	Initial CLO power consumption	- W
Luminaire light beam spread	120°	Average CLO power consumption	- W
Control interface	-	Inrush current	15 A
Connection	Connection unit 2-pole	Inrush time	0.04 ms
Cable	Cable 0.3 m without plug	Power Factor (Min)	0.9
Protection class IEC	Safety class II	Controls and Dimming	
Glow-wire test	Temperature 650 °C, duration 30 s	Dimmable	No
Flammability mark	-	Mechanical and Housing	
CE mark	CE mark	Housing Material	Steel
ENEC mark	-		
Warranty period	3 years		

SmartBright Direct Panel G2

Reflector material	Acrylate
Optic material	Polystyrene
Optical cover/lens material	Polystyrene
Fixation material	-
Optical cover/lens finish	Opal
Overall length	1195 mm
Overall width	295 mm
Overall height	34 mm
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3200 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	88 lm/W
Init. Corr. Color Temperature	6500 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.312;0.328) SDCM≤5
Initial input power	36 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	30000 h
Median useful life L80B50	22000 h
Median useful life L90B50	10000 h

Application Conditions


Ambient temperature range	-10 to +40 °C
Maximum dim level	Not applicable

Product Data

Full product code	871016334991600
Order product name	RC048B LED32S/865 PSU W30L120 NOC GM
EAN/UPC - Product	8710163349916
Order code	911401837780
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	911401837780
Net Weight (Piece)	1.800 kg



Dimensional drawing

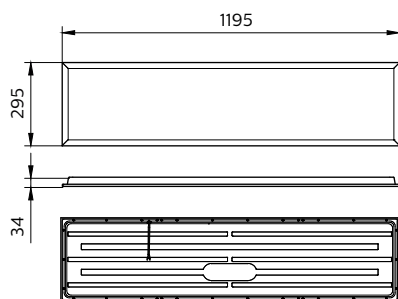

RC092V/RC048B SmartBright Direct Panel

