

SmartBright Direct Panel G2

RC048B LED32S/865 PSU W60L60 NOC GM

Power supply unit - Polystyrene bowl/cover prismatic - 120°

The new Philips Smartbright Direct panel offers exceptional value. It is Perfect for your everyday ceiling lighting installations. It is available in 2 standard sizes and 2 different CCT options to suit your need.

Product data

| General Information | | Number of products on MCB of 16 A type B 36 | |
|-------------------------------|-----------------------------------|---|--------------|
| Beam angle of light source | 120 ° | EU RoHS compliant | No |
| Light source color | White | Light source engine type | LED |
| Light source replaceable | No | | |
| Number of gear units | 1 unit | Operating and Electrical | |
| Driver/power unit/transformer | Power supply unit | Input Voltage | 230 to 240 V |
| Driver included | Yes | Input Frequency | 50 or 60 Hz |
| Optical cover/lens type | Polystyrene bowl/cover prismatic | Inrush current | 15 A |
| Luminaire light beam spread | 120° | Inrush time | 0.04 ms |
| Control interface | - | Power Factor (Min) | 0.9 |
| Connection | Connection unit 2-pole | | |
| Cable | Cable 0.3 m without plug | Controls and Dimming | |
| Protection class IEC | Safety class II | Dimmable | No |
| Glow-wire test | Temperature 650 °C, duration 30 s | | |
| Flammability mark | - | Mechanical and Housing | |
| CE mark | CE mark | Housing Material | Steel |
| ENEC mark | - | Reflector material | Acrylate |
| Warranty period | 3 years | Optic material | Polystyrene |
| Constant light output | No | Optical cover/lens material | Polystyrene |

SmartBright Direct Panel G2

| | |
|---------------------------|--------|
| Fixation material | - |
| Optical cover/lens finish | Opal |
| Overall length | 595 mm |
| Overall width | 595 mm |
| Overall height | 34 mm |
| Color | White |

Approval and Application

| | |
|------------------------------|--------------------------|
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |

Initial Performance (IEC Compliant)

| | |
|-------------------------------------|-------------|
| Initial luminous flux (system flux) | 3200 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 88 lm/W |
| Init. Corr. Color Temperature | 6500 K |
| Init. Color Rendering Index | >80 |
| Initial chromaticity | 0.312;0.328 |
| Initial input power | 36 W |
| Power consumption tolerance | +/-10% |

Over Time Performance (IEC Compliant)

| | |
|---------------------------|---------|
| Median useful life L70B50 | 36000 h |
|---------------------------|---------|

| | |
|---------------------------|---------|
| Median useful life L80B50 | 22000 h |
| Median useful life L90B50 | 10000 h |

Application Conditions


| | |
|---------------------------|----------------|
| Ambient temperature range | -10 to +40 °C |
| Maximum dim level | Not applicable |

Product Data

| | |
|---------------------------------|-------------------------------------|
| Full product code | 871016334021000 |
| Order product name | RC048B LED32S/865 PSU W60L60 NOC GM |
| EAN/UPC - Product | 8710163340210 |
| Order code | 911401807980 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 4 |
| Material Nr. (12NC) | 911401807980 |
| Net Weight (Piece) | 1.875 kg |



Dimensional drawing

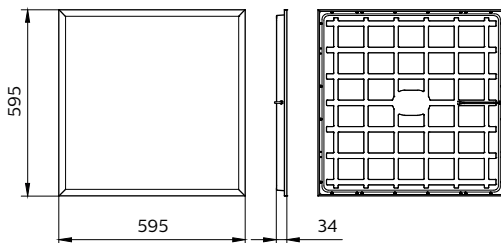

RC092V/RC048B SmartBright Direct Panel

