



MASTER TL-D 90 Graphica



MASTER TL-D 90 Graphica 36W/952 SLV/10

This TL-D lamp has excellent color rendering which makes it very suitable for the graphical and printing industry to check the quality of printed material.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Life To 10% Failures (Nom)	6000 h			
Life to 50% Failures (Nom)	8000 h			
Life to 50% Failures Preheat (Nom)	10000 h			
LSF 2000 h Rated	99 %			
LSF 4000 h Rated	99 %			
LSF 6000 h Rated	99 %			
LSF 8000 h Rated	99 %			
LSF 12000 h Rated	89 %			
LSF 16000 h Rated	33 %			
LSF 20000 h Rated	2 %			
Flux measurement reference	Sphere			
Light Technical				
Color Code	950 [CCT of 5000K]			
Luminous Flux (Nom)	2300 lm			
Luminous Flux (Rated) (Nom)	2330 lm			

Color Designation	Daylight
Chromaticity Coordinate X (Nom)	0.34
Chromaticity Coordinate Y (Nom)	0.351
Correlated Color Temperature (Nom)	5200 K
Luminous Efficacy (rated) (Nom)	65 lm/W
Color Rendering Index (Nom)	95
LLMF 2000 h Rated	93 %
LLMF 4000 h Rated	90 %
LLMF 6000 h Rated	88 %
LLMF 8000 h Rated	85 %
LLMF 12000 h Rated	82 %
LLMF 16000 h Rated	80 %
LLMF 20000 h Rated	78 %
Operating and Electrical	
Power (Nom)	36.8 W
Lamp Current (Nom)	0.440 A

Datasheet, 2021, September 30 data subject to change

MASTER TL-D 90 Graphica

Temperature			
Design Temperature (Nom)	25 ℃		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Shape	T8 [26 mm (T8)]		
Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) Content (Max)	2 mg		
Mercury (Hg) Content (Nom)	2 mg		
Energy Consumption kWh/1000 h	37 kWh		


EPREL Registration Number	423527			
Product Data				
Full product code	871150088864825			
Order product name	MASTER TL-D 90 Graphica 36W/952 SLV/10			
EAN/UPC - Product	8711500888648			
Order code	928044795081			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material Nr. (12NC)	928044795081			
Net Weight (Piece)	135.000 g			
ILCOS Code	FD-36/53/1A-E-G13			

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D 90	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
Graphica 36W/952					
SLV/10					

TL-D Graphica 36W/950

Photometric data

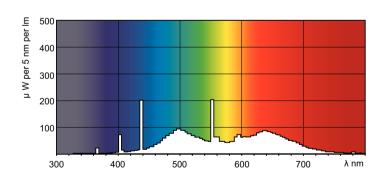


LDPB_TL-D9HCR_950-Spectral power distribution B/W

LDPO_TL-D9HCR_950-Spectral power distribution Colour


MASTER TL-D 90 Graphica


Lifetime



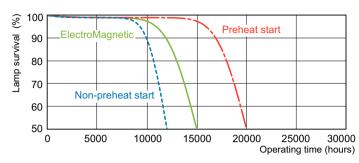

LDLE_TL-D9HCR_0002-Life expectancy diagram



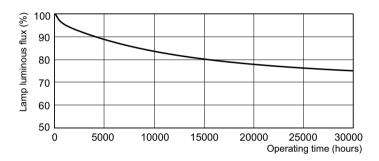

LDLM_TL-D9HCR_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.